


Flush Casement  
System  
**Product  
Data**



**Flush Casement  
Window**

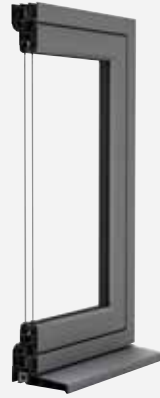

**French Flush Casement  
Window**

PERFORMANCE & ACCREDITATION	Top Hung	Side Hung	Side Hung
U-value (double glazing)	1.2	1.2	1.2
U-value (triple glazing)	N/A	N/A	N/A
Energy Rating (WER)	A+	A+	A+
Green Guide Rating #	A		A
Acoustic Performance-various options depending on specification-RW (C;Ctr)	36 to 44		36 to 44
Air Tightness (Pa)	Class 3 (600Pa)	Class 3 (600Pa)	Class 4 (600Pa)
Water Tightness (Pa)	Class 9A (600Pa)	Class 9A (600Pa)	Class 9A (600Pa)
Wind Loading (Pa)	C3 (1200Pa)	CE2400 (2400Pa)	Class B4 (1600Pa)
Security	PAS 24		PAS 24
PAS 24 Size Limits (mm)	1210 x 910	710 x 1310	710 x 1310
Secured by Design (SBD)	✓		✓
CONFIGURATIONS			
Top Hung Outward	✓		
Side Hung Outward	✓		✓
Fixed Light	✓		✓
Multilight	✓		✓
SASH WEIGHT & SIZE LIMITS			
Maximum Sash Weight*	50 kg	40 kg	40 kg
Maximum Sash Size (mm)	1210 x 1210	710 x 1310	740 x 1240
SYSTEM FEATURES			
System Depth (mm)	70		70
Multipoint Locking	✓		✓
Glazing Options	Internally Beaded		Internally Beaded
Glazing Thickness (mm)	24/28/32		24/28/32

\* Hardware dependent